



EP04/51940




EP04/51940



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ



I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated


22 October 2004

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Best Available Copy

The
Patent
Office

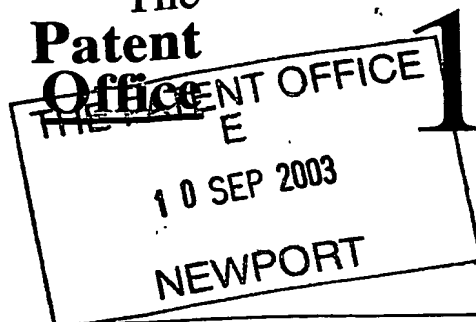

1/77

The Patent Office

Cardiff Road
Newport
South Wales NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet, from the Patent Office to help you fill in this form)

1. Your reference

ADT0199

2. Patent application number

(The Patent Office will fill in this part)

10 SEP 2003

0321171.1

10SEP03 E836335-25 002806
_P01/7700 0.00-0321171.1

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Hewlett-Packard Development Company L.P.
20555 S.H. 249
Houston
Texas 77070
United States of America

Patents ADP number (if you know it)

08557886001

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

A DATA STRUCTURE FOR AN ELECTRONIC
DOCUMENT AND RELATED METHODS

5. Name of your agent (if you have one)

Barker Brettell

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

138 Hagley Road
Edgbaston
Birmingham
B16 9PW

Patents ADP number (if you know it)

7442494002

6. Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.

Country

Priority application number
(if you know it)

Date of Filing
(day/month/year)

7. Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)

Number of earlier application

Date of filing
(day/month/year)

8. Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request? Answer 'Yes' if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
Otherwise answer NO (See note(d))

YES

Patents Form 1/77

Indicate the number of sheets for any of the following items you are filing with this form.

Do not count copies of the same document

Continuation sheets of this form -

Description 23 + 23 (INC. APPENDIX A) ✓

Claim(s) 04 + 04

Abstract 01 + 01

Drawing(s) 04 + 04

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination 1 ✓
(*Patents Form 9/77*)

Request for substantive examination
(*Patents Form 10/77*)

Any other documents
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature
Barker Brettell

Date

10 September 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

ANDREW TRANTER

Tel: 0121 456 1364

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

When need help to fill in this form or you have any questions, please contact the Patent Office on 0121 359 3000.

A DATA STRUCTURE FOR AN ELECTRONIC DOCUMENT AND RELATED METHODS

FIELD OF THE INVENTION

5

This invention relates to a data structure for an electronic document and related methods.

BACKGROUND OF THE INVENTION

10

It is known to use documents having position identification markings in combination with a pattern reading device such as a digital pen. The device may have an imaging system, such as an infra red camera, within it, which is arranged to image a small area of the page close to the pen nib. The pen includes a processor having image processing capabilities and a memory and is triggered by a force sensor in the nib to record images from the camera as the pen is moved across the document. From these images the pen can determine the position of any marks made on the document by the pen. The pen markings can be stored directly as graphic images, which can then be stored and displayed in combination with other markings on the document. In some applications the simple recognition that a mark has been made by the pen on a predefined area of the document can be recorded, and this information used in any suitable way. This allows, for example, forms with check boxes on to be provided and the marking of the check boxes with the pen to be detected. In further applications the pen markings are analysed using character recognition tools and stored digitally as text. Systems using this technology are available from Anoto AB and described on their website www.Anoto.com.

30

It will be appreciated that in order to use a pen and a document using the position identification markings it is necessary to have media, generally paper, on which the position identification markings have been provided. This media may comprise a plain media, or may comprise a form or the like on which information is provided in addition to the position identification markings. A user may then use his/her pen to add to the media whether or not it has such additional information.

Prior art solutions have provided content (e.g. a layout of a form, etc.) and metadata (i.e. data about the position identification markings) in a variety of formats. Prior solutions have suffered from problems of marrying the correct content to the correct metadata to produce the document required by the user.

15

SUMMARY OF THE INVENTION

According to a first aspect of the invention there is provided a data structure which defines an electronic document, the data structure comprising first and second substantially separate portions of data; the first portion of data defining the content of the document and the second portion comprising data relating to a pattern of position identification markings such that when the electronic document is printed a pattern reading device, such as a pen, is able to determine its position relative to the position identification markings.

The data structure most conveniently comprises a single data file with the first and second data portions being embedded within the data file.

structure to various locations between processing apparatus, etc., to electronically process the document and the like. A user can access both the content and the pattern data from a single file, and the content and pattern will not be easily separated. The electronic document can be
5 printed out in hard copy, thus providing a digital document for use with a digital pen. The pattern and content may be superimposed in this digital document.

The data structure may be written in such a form that the data structure
10 may be converted from one format to other formats without losing any of the information from the file, particularly information about the pattern. This may be achieved by providing the second portion of data as metadata and providing one or more controls which control the way in which the second portion of data is converted between formats to preserve the
15 pattern. In one embodiment of the invention the second portion of data may comprise XMP language meta-data (Extensible Metadata platform) data. This can be embedded in a data structure saved in the following formats: a PDF format (Portable Document Format as provided by the Adobe™ corporation); JPEG (Joint Photographic Experts Group); SVG
20 format (Scalable Vector Graphics); GIF (Graphics Interchange Format); TIFF (Tagged Image File Format); PNG (Portable Network Graphics).

Use of the XMP format for the metadata means that the data structure can readily be converted using proprietary software known in the art
25 between these formats whilst preserving the pattern information defined by the data. Any software which can scan a file for metadata will be able to identify the pattern data as distinct from the content and so determine which pattern is needed when printing. For a more detailed explanation of such XMP metadata the reader is referred to "Embedding XMP Metadata

5

10

25

The second portion defining the present may comprise October 5, 1962.

pattern. It could alternatively comprise an entry of information which is a self-describing definition of a portion of pattern within a pattern space.

For example, the metadata information about the pattern contained in the data structure may comprise the co-ordinates of at least one corner of a portion of pattern from a two-dimensional pattern space and optionally its size. If the space is fully characterised by a two-dimensional co-ordinate system this is all that is needed for a suitably enabled printer driver to generate the pattern. Additionally or alternatively, it may define the length of a side of at least one side of the portion, the shape of the portion or a set of absolute co-ordinates defining the boundary of the portion in the pattern space.

The metadata which is embedded in the second portion of the data structure may identify the location of a portion of pattern in a pattern space in many other ways. It could be a pointer to a server on which the pattern is stored, or which is capable of allocating the pattern to the document. To be useful a pattern space should be very large allowing it to be allocated to many hundreds or thousands of documents such that each document is allocated a unique portion of pattern. To make this more manageable the pattern space could be divided according to rules into sub-regions of known size, each of which may be referred to as a shelf of position identification markings. Each of the shelves may be further subdivided into individual pages. Within each page an (X,Y) co-ordinate may be defined for each point within the page of position identification markings to define any portion of the position identification markings used within a printed document. In this case, the data embedded in the second data portion may comprise data identifying both a shelf, a page on that shelf and the co-ordinates of a portion of pattern within that page.

Providing data about the pattern as metadata within a file in this way ensures that together with some knowledge of the rules which define the pattern space the document contains all the information needed to print the correct content with the correct pattern. All that is needed is
5 knowledge of the pattern space the portion is selected from.

In other words, an algorithm or the like may generate the portion of pattern from the data by identifying co-ordinates or other meta-data identifying the portion of the position identification marking.
10

The data structure may comprise a data file written in a mark up language such as XML and the second portion of data may comprise XML metadata embedded within the data file. The data file may be in any one of a number of different formats for example PDF. It could in fact be in any
15 known language which can be interpreted by a suitable printer driver or printer.

According to a second aspect of the invention there is provided a method for generating an electronic document comprising:
20 creating an electronic file and storing in that file at least some content and at least some position identification markings arranged to allow a pattern reading device to determine its position within the position identification markings, the electronic file being capable of generating an electronic document.

25

The method may allow the electronic document to be converted from a first file format, in which it is stored, to a second file format. The first file format may be a format in which the document is stored as a single file, and the second file format may be a format in which the document is stored as a set of files. The method may also allow the electronic document to be converted from a first file format, in which it is stored, to a second file format. The first file format may be a format in which the document is stored as a single file, and the second file format may be a format in which the document is stored as a set of files. The method may also allow the electronic document to be converted from a first file format, in which it is stored, to a second file format. The first file format may be a format in which the document is stored as a single file, and the second file format may be a format in which the document is stored as a set of files.

Attorney Ref: ADT0199

Graphics); GIF (Graphics Interchange Format); TIFF (Tagged Image File Format); PNG (Portable Network Graphics); or any other suitable file format.

- 5 According to a third aspect the invention provides a digital document production application suitable for producing a data structure defining a digital document comprising:

content receiving means for receiving the content of the digital document;
pattern receiving means for receiving data defining a pattern of position
10 identification markings allocated to at least a portion of the document;
and

data structure generating means for generating a data structure defining the digital document which data structure comprises a first portion of data defining the content and a second portion of data defining the pattern.

15

The content receiving means may include a graphical user interface. This may present to a user an image of a document on a screen to which a user can add content. Alternatively, it may call up a content file containing content. The content file could be a text file from a word processing
20 package, or a spreadsheet from a database or a drawing from a drawing package. It may obtain content from more than one file.

The pattern receiving means may include a means for requesting pattern from a server or from a store of locally held pattern information. The
25 program may make this request once a user has indicated that the design of the document content is complete.

The data structure may be generated by the program automatically once a user has indicated that the design of the content is complete.

30

Of course, it will be readily understood that a technically competent user could produce such a data structure directly using a text editor. The program of this aspect of the invention makes the process considerably simpler and allows users of low technical ability to produce digital documents.

According to a fourth aspect of the invention there is provided a data carrier containing instructions which when read onto a computer cause that computer to perform the method of the second aspect of the invention or provide the application of the third aspect.

According to a fifth aspect of the invention there is provided a data carrier containing instructions which when read onto a computer provide the electronic document of the first aspect of the invention.

The data carrier of any of the above aspects of the invention can comprise a floppy disk, a CDROM, a DVD ROM/RAM (including +RW, -RW), a hard drive, a non-volatile memory, any form of magneto optical disk, a wire, a transmitted signal (which may comprise an internet download, an ftp transfer, or the like), or any other form of computer readable medium.

According to a further aspect of the invention there is provided a source file for a printed digital document, the printed document comprising content and a pattern of position identification markings arranged to allow a pattern reading device to determine its position within the position identification markings, the source file comprising at least a first portion defining the content and a second portion comprising metadata which

Preferred embodiments of a data structure defining a digital document in accordance with the present invention will now be described by way of example only with reference to the accompanying drawings in which:

5

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 shows a digital document created from an embodiment of a data structure according to an embodiment of the present invention;

10

Figure 2 shows in detail part of the digital document of Figure 1;

Figure 3 shows a prior art digital pen for use with the document of Figure 1;

15

Figure 4 is a flow diagram showing a method of generating a digital document in accordance with an embodiment of the present invention;

20

Figure 5 shows the allocation of pattern space to the document of Figure 1, in accordance with an embodiment of the present invention;

25

Figure 6 shows an electronic file defining the document of Figure 1, in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Figure 1 a digital document 100 for use in a digital pen and paper system comprises a carrier 102 in the form of a single sheet of

30

paper 104 with position identifying markings 106 printed on some parts of it to define pattern areas 107 of a position identifying pattern 108. Also printed on the paper 104 are further markings 109 which are clearly visible to a human user of the document 100. These markings make up the content of the document 100. The content 109 will obviously depend entirely on the intended use of the document. In this case an example of a very simple two page questionnaire is shown, and the content includes a number of boxes 110, 112 which can be pre-printed with user specific information such as the user's name 114 and a document identification number 116. The content further comprises a number of check boxes 118 any one of which is to be marked by the user, and two larger boxes 120, 121 in which the user can write comments. The document content also includes a send box 122 to be checked by the user when he has completed the questionnaire to initiate a document completion process by which pen stroke data is forwarded for processing, and typographical information on the document 100 such as the headings or labels 124 for the various boxes 110, 112, 118, 120. The position identifying pattern 108 is only printed onto the parts of the document 100 which the user is expected to write on or mark, that is within the check boxes 118, the comments boxes 120, 121 and the send box 122.

Referring to Figure 2, the position identifying pattern 108 is made up of a number of dots 130 arranged on an imaginary grid 132. The grid 132 can be considered as being made up of horizontal and vertical lines 134, 136 defining a number of intersections 140 where they cross. The intersections 140 are of the order of 0.3mm apart. One dot 130 is provided on each intersection 140. For clarity, only one dot 130 is shown on each intersection 140.

130, for example any group of 36 dots arranged in a six by six square, will be unique within a very large area of the pattern. This large area is defined as a total imaginary pattern space, and only a small part of the pattern space is taken up by the pattern on the document 100. By
5 allocating a known area of the pattern space to the document 100, for example by means of a co-ordinate reference, the document and any position on the patterned parts of it can be identified from the pattern printed on it. An example of this type of pattern is described in WO 01/26033. It will be appreciated that other position identifying
10 patterns can equally be used. Some examples of other suitable patterns are described in WO 00/73983 and WO 01/71643.

Referring to Figure 3, a pattern reading device comprising a pen 300 comprises a writing nib 310, and a camera 312 made up of an infra red
15 (IR) LED 314 and an IR sensor 316. The camera 312 is arranged to image a circular area of diameter 3.3mm adjacent to the tip 311 of the pen nib 310. A processor 318 processes images from the camera 312. A pressure sensor 320 detects when the nib 310 is in contact with the document 100 and triggers operation of the camera 312. Whenever the pen is being used
20 on a patterned area of the document 100, the processor 318 can therefore determine from the pattern 108 the position of the nib of the pen whenever it is in contact with the document 100. From this the processor can determine the position and shape of any marks made on the patterned areas of the document 100. This information is stored in a memory 320 in
25 the pen as it is being used. When the user has finished marking the document, in this case when the questionnaire is completed, this is recorded in a document completion process, for example by making a mark with the pen in the send box 122. The pen is arranged to recognise the pattern in the send box 122 and determine from that pattern the

identity of the document 100. Suitable pens are available from Logitech under the trade mark Logitech Io.

5 The foregoing discussion is related to known systems and preferred embodiments of the present invention are described hereinafter.

10 In order to produce a digital document 100, the first step is the design and creation of an electronic document file containing content. The electronic document can be printed as a hard copy digital document or displayed on a screen. Referring to Figure 4, the design of the content of the document is carried out on a PC using an application (Step 600). In this example the application is Acrobat Reader and the PC also runs a number of other applications including a word processing package such as 'Word' a database package such as 'Access', and a spreadsheet package
15 such as 'Excel'. Each of these applications can be used to design the content of the document. The user defines areas of the document to which the pattern 108 are to be applied, for example, a digital document creation application or form design tool (FDT) in the form of an Acrobat 5.0 plug-in.

20

In this example the content is converted to a Portable Document Format (PDF) file (Step 602). Pattern areas for the document are then defined using the FDT (Step 604). The split of the pattern areas within the document is defined (Step 606) producing a digital document defining
25 both the content and the positions and shapes of the pattern areas. The format of this digital document will again comprise a PDF file, the data structure of which will be described hereinafter. Of course, it will be

APPENDIX 1
APPENDIX 2
APPENDIX 3
APPENDIX 4
APPENDIX 5
APPENDIX 6
APPENDIX 7
APPENDIX 8
APPENDIX 9
APPENDIX 10
APPENDIX 11
APPENDIX 12
APPENDIX 13
APPENDIX 14
APPENDIX 15
APPENDIX 16
APPENDIX 17
APPENDIX 18
APPENDIX 19
APPENDIX 20
APPENDIX 21
APPENDIX 22
APPENDIX 23
APPENDIX 24
APPENDIX 25
APPENDIX 26
APPENDIX 27
APPENDIX 28
APPENDIX 29
APPENDIX 30
APPENDIX 31
APPENDIX 32
APPENDIX 33
APPENDIX 34
APPENDIX 35
APPENDIX 36
APPENDIX 37
APPENDIX 38
APPENDIX 39
APPENDIX 40
APPENDIX 41
APPENDIX 42
APPENDIX 43
APPENDIX 44
APPENDIX 45
APPENDIX 46
APPENDIX 47
APPENDIX 48
APPENDIX 49
APPENDIX 50
APPENDIX 51
APPENDIX 52
APPENDIX 53
APPENDIX 54
APPENDIX 55
APPENDIX 56
APPENDIX 57
APPENDIX 58
APPENDIX 59
APPENDIX 60
APPENDIX 61
APPENDIX 62
APPENDIX 63
APPENDIX 64
APPENDIX 65
APPENDIX 66
APPENDIX 67
APPENDIX 68
APPENDIX 69
APPENDIX 70
APPENDIX 71
APPENDIX 72
APPENDIX 73
APPENDIX 74
APPENDIX 75
APPENDIX 76
APPENDIX 77
APPENDIX 78
APPENDIX 79
APPENDIX 80
APPENDIX 81
APPENDIX 82
APPENDIX 83
APPENDIX 84
APPENDIX 85
APPENDIX 86
APPENDIX 87
APPENDIX 88
APPENDIX 89
APPENDIX 90
APPENDIX 91
APPENDIX 92
APPENDIX 93
APPENDIX 94
APPENDIX 95
APPENDIX 96
APPENDIX 97
APPENDIX 98
APPENDIX 99
APPENDIX 100

Attorney Ref:ADT0199

Depending on the FDT, the pattern areas 107 can be defined in terms of their absolute positions, sizes and shapes on the document, or in relation to the content, such as by an indication of which of the boxes 114, 116, 118, 120, 121, 122 are to have the pattern 108 printed in them.

5 Alternatively, the pattern areas 107 can be defined by a combination of their absolute positions, sizes and shapes on the document, and in relation to the content printed in them.

Association of a pattern area 107 with a content feature, such as a check
10 box, can be used such that moving the content feature within the document design moves the associated pattern area 107 with it. This is helpful when designing and modifying the document. Although, a specific pattern area 107 is associated with each of the printed boxes 118, 120, 121, 122, the pattern areas 107 do not have to correspond exactly to the
15 areas of the printed boxes 118, 120, 121, 122. Each of the pattern areas 107 will generally be made larger than the box 118, 120, 121, 122 with which it is associated. This allows for inaccurate positioning of a user made mark upon the page, whilst ensuring that the pen 300 will still be able to detect where the mark is on the page.

20

The pattern areas 107 have respective positions within the total pattern space area allocated to them. These allocated positions within the total pattern space are requested from, and allocated by, a pattern allocating server. Referring to Figure 5, a single page 700 of pattern space required
25 for the document 100 can be broken down by the FDT into a number of separate pattern space areas 718, 720, 721, 722. These pattern space areas 728, 720, 721, 722 are to be allocated to the respective boxes 118, 120, 121, 122 on the document 100 (Step 606). These pattern space areas 718, 720, 721, 722 are arranged on the page 700 of pattern space in any
30 suitable way. In particular, the relative positions of the pattern space

areas 718, 720, 721, 722 on the pattern space page 700 can differ from their relative positions on the final document 100.

Each area is identified by its coordinates on the page 700. In this case it is assumed that all allocated pattern space areas will be rectangular, and each is identified by the position of its top left and bottom right corners. The coordinate system used has its origin at the top left hand corner 724 of the page and includes an x coordinate indicating the distance to the right of the origin, and a y coordinate indicating the distance down from the origin. The pattern space area 720, for example, is identified by the coordinates (0,0; x_1 y_1).

It would of course be possible to use other co-ordinate systems. For example, some embodiments may store co-ordinates for a corner and a depth and height of the rectangular area. Other embodiments may not assume that the areas are rectangular. They may assume, for example, that the area is circular and as such store a co-ordinate for the centre of the area together with a radius and/or diameter for the area. Other embodiments can specify the shape of the area (for example square, circular, elliptical, and the like) and then store information defining that area.

Functions associated with the various patterned areas, if any, 718, 720, 721, 722 are defined (Step 608). This allows an application using the document 100 to process data received back when the document 100 has been written on. In the case of the questionnaire document 100 the pattern areas in the larger boxes 120, 121 are identified as a graphical input

respective response options so that the checking of the boxes 118 on a number of the documents 100 produces a standard mark, such as a cross, in the check box of the stored document.

- 5 Finally the designed electronic document 100 is saved as a single electronic document file and allocated a document name (Step 610).

Upon completion of the design of the document 100 a data structure (in this example a PDF file 800) will have been created, as shown in Figure
10 6. The PDF file 800 comprises a first portion which includes graphical information 802 defining the content of the document 100, and a second portion 804 which comprises a pattern area definition defining the sizes and positions of the pattern areas 107 on the document 100.

- 15 Also as shown in Figure 8, the file may contain other, optional, features. For example, the file 800 may also contain information relating to the functions (if any) associated with the pattern areas on the document 100 and the relative positions of the pattern areas within the pattern space page 700 allocated to the document 100.

20

Additionally, the PDF file 800 may contain a document ID 806, a traceability code 808 of the pattern associated with the send box 122, and other active information 810, associated with pattern areas other than the send box 122. The traceability code 808 and active information 810 are
25 used when the pattern areas upon the document 100 are passed over by the digital pen 300 such that a correlation between the location of a pattern area within the document and the pattern area's activity can be established by a processor, either within the pen 300 or remote from the pen 300.

30

The PDF file 800 may also contain mapping information 812 for mapping data from databases or other sources onto the document 100. For example data such as the location of the user's name 114 and document ID number 116 within the database 414 can be extracted therefrom. Also, if pre-filled fields are used within the document 100 values 814 for filling these pre-filled fields can be extracted from the database 414. For example, the user's name 114 and ID 116 can be extracted from the database 414 and automatically printed upon the document 100.

The PDF file 800 also contains, as in this example, a document instance ID 816 which is unique to the individual document to be printed. Usually, this data is not placed into the file 800 until the time of printing. Normally, there will only be one printed document with a particular instance ID 816 so that individual documents can be tracked and identified. However, in some instances it is desirable to be able to print more than one copy of exactly the same document with the same document instance ID 816, for example in secret ballots where anonymity is desirable. Therefore provision is made to allow the printing of more than one copy of a given document with the same instance ID 816.

Thus, the PDF file 800 basically provides a data structure comprising a first portion of data relating to content of the document 100 (i.e. the graphical information 802) and a second portion of metadata relating to position identification markings within the document (i.e. pattern area definition 804). The pattern data indicates which portions of an overall position identification pattern-space have been used within a document and the location of these portions within the document. Such a data

structure is shown in FIG. 1. The data structure is a PDF file 800 which contains a first portion of data relating to content of the document 100 (i.e. the graphical information 802) and a second portion of metadata relating to position identification markings within the document (i.e. pattern area definition 804). The pattern data indicates which portions of an overall position identification pattern-space have been used within a document and the location of these portions within the document. Such a data structure is shown in FIG. 1.

Attorney Ref:ADT0199

the data structure must be printed before it can be used with the pen (or perhaps displayed on a screen).

5 The data structure entries relating to position identification markings within the document can include semantic data about graphical items, typical graphical items include a check box, or a text box. For example, the information that the text box is to be used to introduce a phone number can be linked to the text box, as can which portion of the overall position identification pattern relates to the text box. This semantic data
10 for the text box is stored as metadata within the PDF file 800.

The details of a server which is to be contacted for access permissions, control and tracking of the overall position identification pattern are also typically stored as metadata within the PDF file 800. Similarly, details of
15 how to print the portion of the overall position identification pattern that relates to the text box, perhaps using the server, and data relating to the pattern printing rights and/or licences can also be embedded within the PDF file 800, typically as XML data.

20 The data structure entries relating to position identification markings within the document and/or data identifying content within the electronic document 100 may be thought of as metadata (i.e. data about data).

In one embodiment, the metadata (for example XML) is embedded within
25 the PDF file 800 and is used to provide a self-describing representation of the position identification markings. Appendix A shows a sample XML file where "Pattern(X,Y)" details which section of the overall position identification pattern is to be inserted within a document and "Page(X,Y)" describes the position of the section of position
30 identification pattern within a page of a document to be printed. "Layer"

describes the layer where the section of position identification pattern will be pasted. This "Layer" descriptor is useful where an overlap of sections of position identification pattern occurs, as the layer with the lowest "Layer" value will be printed. "IsMagicBox" is merely an attribute for
5 the section of position identification pattern contained within the document.

The metadata may be organised into related groups of properties. For example, the groups may be relevant certain modules in a system used to
10 manage, distribute and print an electronic document provided by the PDF file 800. The groups may be implemented as schemas that define an XML namespace, such that elements and attributes can have the same name but originate from differing sources. This allows mark up elements within an XML file from the differing sources to be identified.

15

A set of rules are also defined in order to preserve the metadata when a file is opened and then saved in a file format different to that in which it was opened.

20 When transcribing between file formats the original representation used in the writing of the metadata should be preserved in the output. Custom properties can be added to a document such as a PDF file, each custom property having a name and a value. These "name"/"value" pairs are stored within the data file as metadata and when a file's format is changed
25 the metadata is transcribed to the correct location within the new file format keeping pairs together.

Attorney Ref: ADT0199

pattern data is contained in a metadata stream within a PDF object within the file. On the other hand, if the data structure is in the form of a JPEG file, and the pattern data is again provided in an XML packet, the file will use a marker (known as an APP1 marker) to designate the location of the XML packet containing the position identification pattern metadata. Therefore, when transcribing a PDF file to a JPEG file the XML packet containing the position identification pattern metadata should be transcribed to the correct location within the APP1 marker of the JPEG file and vice-versa. Similar transcriptions of metadata location data must take place when changing between any file formats, such as GIF, PNG, TIFF, SVG or any other suitable file format.

Therefore, because the metadata is enclosed within a file 800 as metadata, documents retain their context when they exit their original system or environment. Thus, the form and properties of the documents are preserved when the program that uses the documents is not the final authority, i.e. when the program used to read, represent and translate the properties is a different program from that used to create the metadata.

Use of metadata for pattern information enables users to store, retrieve, distribute and share digital paper documents that can be easily and correctly viewed by any user with access to them. Further, the electronic document file 800 having metadata embedded therein allows a single file 800 to be distributed for a given document rather than needing to distribute multiple files, each relating to a separate property of the document. The use of separate multiple files describing a single document has a number of disadvantages including managing a plurality of versions, ensuring all of the files relate to the same version of the document, and the increased risk of loss or corruption of a single file resulting in the loss of a complete document. Providing a single file 800

results in the data content and metadata of the file 800 being edited at the same time. Further, the embedded metadata may include XML schema.

- Further, the metadata can be embedded using a file embedding mechanism that allows applications to more easily locate metadata in files by scanning of the file 800 rather than needing to parse a specific applications file format. Such an arrangement makes the metadata more accessible and further aid document interchange and management.
- 10 In an alternative embodiment the metadata is embedded within the data defining the pattern areas 718, 720, 721, 722 as an invisible font in the file 800. For example, text characters are defined in a predetermined manner by a string of data, and part of the string for each character defines the font in which the character will be printed. The data defining
- 15 the pattern areas 718, 720, 721, 722 is therefore put into the format of a series of text characters, with a non-valid font definition so that they will not be printed as characters by the printer. In this embodiment a printer or other processing device used to print the file 800, or otherwise process it, is arranged to recognize the non-printable text characters, by means of
- 20 the non-valid font definition. The printer, or other processing device, interprets the data defining the non-printable text characters in a different manner to standard, printable, text characters as identifying the size, shape, and position of the required pattern areas 718, 720, 721, 722. The non-valid font definition either provides the pattern of the position
- 25 identification markings or provides instructions as to how the printer can obtain the pattern, typically from a networked resource, such as a server.

the data between them is to be interpreted as a definition of the pattern areas 718, 720, 721, 722.

Thus, when the PDF file 800 is sent for printing each graphic object
5 contained within the PDF file 800 is received by the printer and the valid graphic objects are printed in the conventional manner. Those characters with non-valid font definitions are interpreted such that the pattern areas 718, 720, 721, 722 are printed in their defined areas of the document.

10 In the embodiments described hereinbefore it is stated that the creation of the data set defining the digital document is performed by a form design tool, requiring pattern to be allocated at the design stage. This need not be the case in other embodiments. For example, the data structure may be created by a printer driver upon receipt of a file which comprises content
15 and a file which defines at least one pattern area. Before receipt by the printer driver the area need not have actual pattern allocated to it, this being performed by the printer driver, perhaps by accessing a pattern allocation server.

20 The output of such a printer driver would be a data structure in accordance with at least one embodiment of the present invention. Also, it is possible that the output of the form design tool could be an embodiment of a data structure which is within the scope of at least one aspect of the invention.

25

The output of the FDT may comprise a data structure which includes a portion of data defining content and a second portion of data which defines the location of pattern areas within the document rather than the location of pattern for those areas within pattern space. As before, this
30 second portion of data may comprise metadata about where in the

Attorney Ref:ADT0199

document pattern is to be placed. As an example, the metadata may indicate that the designed document is to contain some pattern at its upper left corner; and that the pattern is to cover one third of the page. The printer driver - upon reading this metadata - allocates an appropriate
5 portion of pattern and replaces the original metadata with new metadata defining the position of a portion of pattern in pattern space.

CLAIMS

1. A data structure which defines an electronic document, the data
5 structure comprising first and second substantially separate portions of
data; the first portion of data defining the content of the document and the
second portion comprising data relating to a pattern of position
identification markings such that when the electronic document is printed
a pattern reading device, such as a pen, is able to determine its position
10 relative to the position identification markings.
2. A data structure according to claim 1 which comprises a single data
file with the first and second data portions being embedded within the
data file.
15
3. A data structure according to claim 1 or claim 2 which is written in
such a form that the data structure can be converted from one format to
other formats without losing any of the information from the document.
- 20 4. A data structure according to any preceding claim in which the
second portion of data comprises metadata and in which the data structure
includes one or more controls which control the way in which the second
portion of data is converted between formats to preserve the pattern.
- 25 5. A data structure according to any preceding claim in which the data
in the second portion comprises any one or more of the following: data
from which an algorithm or the like can generate the pattern; co-ordinates
or other metadata identifying the portion of the position identification
marking.

6. A data structure according to any preceding claim in which the at least one portion providing the position of the position identification markings within the document and/or data identifying the content of the position identification marking in the document is provided in XML
- 5
7. A data structure according to any preceding claim in which a schema, generally an XML schema, is provided.
8. An application adapted to produce an electronic document, the application comprising:
- 10 content receiving means for receiving the content of the electronic document,
- pattern receiving means for receiving data defining a pattern of positional markings allocated to at least a portion of the document; and
- 15 data structure generating means for generating a data structure defining the electronic document which data structure comprises first and second substantially separate portions of data, the first portion of data defining the content and the second portion of data relating to the pattern.
- 20 9. A method for generating an electronic document comprising creating an electronic file and storing in that file data and metadata, the data defining at least some content and the metadata relating to a pattern of position identification markings arranged to allow a device, such as a pen, to determine its position within the position identification markings,
- 25 the electronic file capable of generating an electronic document.

10. A method according to claim 9 in which a file embedding
operation is used to embed metadata in the file.
The file embedding operation is used to embed the metadata in the file.

11. A data carrier containing instructions which when read onto a computer cause that computer to perform the method of claim 9 or claim 10.

5 12. A data carrier containing instructions which when read onto a computer cause that computer to provide the data structure of any of claims 1 to 7.

10 13. A data carrier containing instructions which when read onto a computer cause that computer to provide the digital document creation application of claim 8.

14. A data carrier containing instructions which when read onto a computer cause that computer to perform the method of claim 9 or 10.

15

15. A source file for a digital document, the digital document comprising content and a pattern of position identification markings arranged to allow a device, such as a pen, to determine its position within the position identification markings, the source file comprising at least
20 first and second portions of data, the first portion defining the content and the second portion comprising metadata which provides a self-defining description of the pattern.

16. A data structure providing an electronic document substantially as
25 described herein and as illustrated in Figure 1,2,4,5 and 6 of the accompanying Figures.

17. An electronic document creation application substantially as
30 described herein and as illustrated in Figure 1,2,4,5 and 6 of the accompanying Figures.

18. A method for generating an electronic document substantially as described herein and as illustrated in Figure 1,2,4,5 and 6 of the accompanying Figures.

ABSTRACT

**A DATA STRUCTURE FOR AN ELECTRONIC DOCUMENT AND
RELATED METHODS**

5

A data structure which defines an electronic document comprises first and second substantially separate portions of data. The first portion of data defining the content of the document and the second portion comprising
10 data relating to a pattern of position identification markings (106) such that when the electronic document is printed a pattern reading device, such as a pen (300), is able to determine its position relative to the position identification markings.

15

To be accompanied by Figure 1 when published.

APPENDIX A

```
5  = <Document DLDVersionNumber="0" DLDSUBVersionNumber="1"
    DLDPrintableVersionNumber="0.1" NumberOfForms="1">
    =
      <FormnumberOfPages="1"formID="gfggg"userdata="Not
        Used"formInstanceID=""templateID="PODTemplateV1"
        local="0"standardSize="A4"pagesizeheight="0"
        pagesizewidth="0">
10  = <FormPagepageOrientation="Portrait" tcX="0"
      tcY="601" initialXMargin="0" initialYMargin="0">
      <DrawingArea patternX="1402" patternY="1165"
        pageX="597" pageY="891" width="82"
        height="82" layer="1" IsaMagicBox="0" />
15  <DrawingArea patternX="1126" patternY="365"
        pageX="321" pageY="91" width="124"
        height="64" layer="1" IsaMagicBox="0" />
      <DrawingArea patternX="1301" patternY="365"
        pageX="496" pageY="91" width="159"
20  height="74" layer="1" IsaMagicBox="0" />
      </FormPage>
    </Form>
  </Document>
```

25

Fig 1

104 102 100

114 J SMITH 110

116 1976052 112

COMMENTS

106 107 108

109 ☐ V. GOOD

118 ☐ GOOD 124

☐ AVERAGE

☐ BAD

☐ V. BAD

SEND ☐ 122

FURTHER COMMENTS

121

120


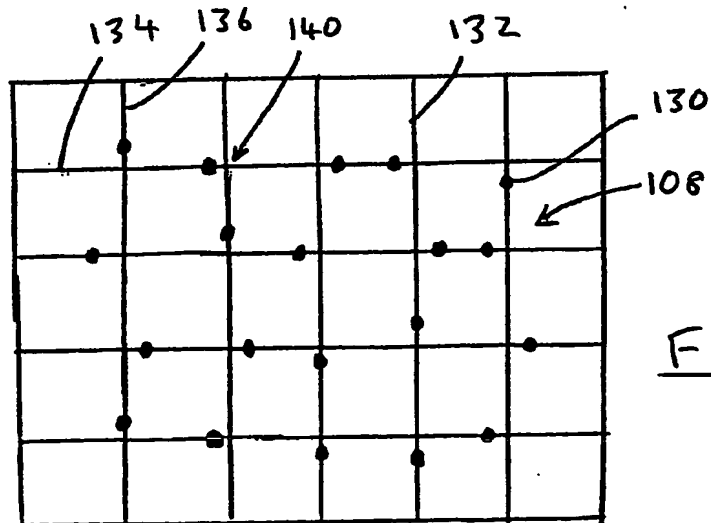



Fig 2

Fig 3

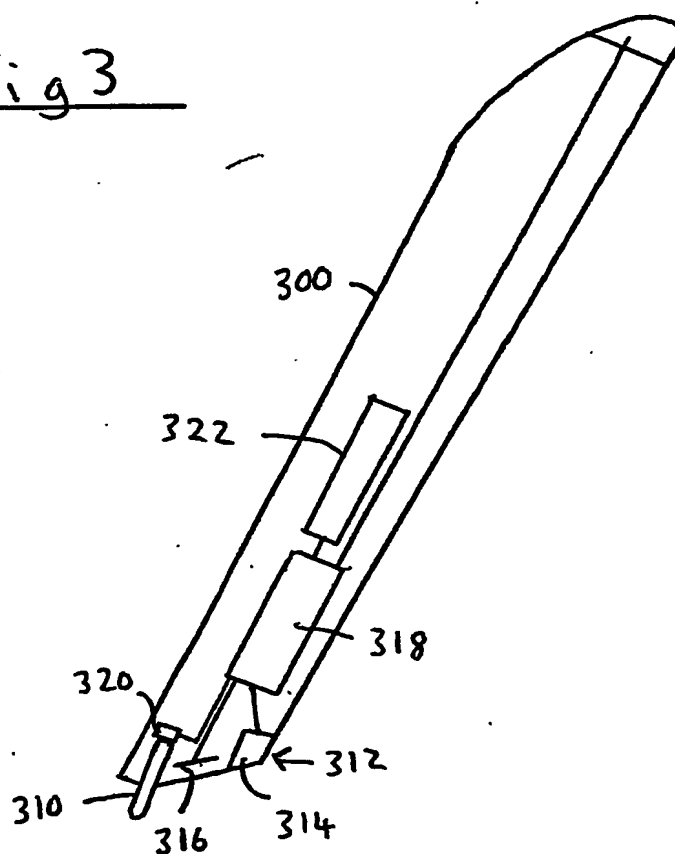

Prior Art

3/4
Fig 4

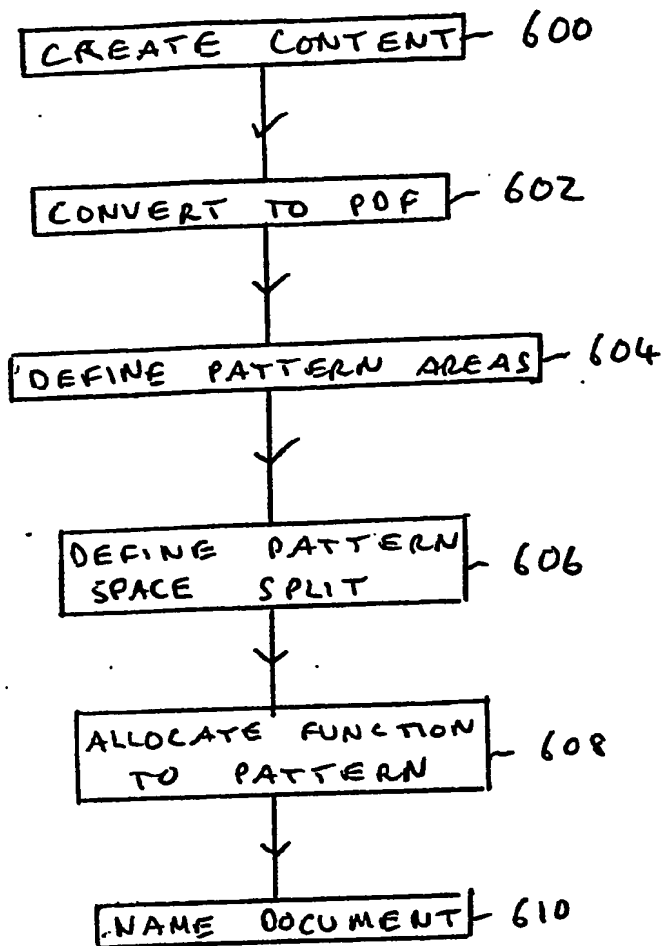

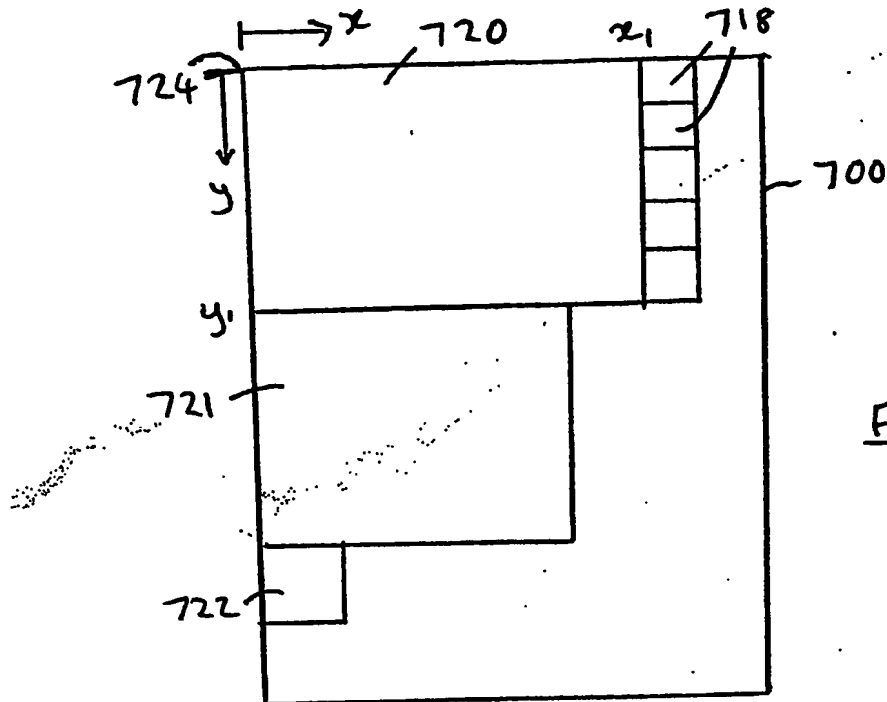


Fig. 5

Fig. 6

| | |
|-----------------------------|-----|
| 800 | |
| GRAPHICAL INFORMATION | 802 |
| PATTERN AREA DEFINITION | 804 |
| DOCUMENT ID | 806 |
| SEND BOX, TRACEABILITY CODE | 808 |
| ACTIVE INFORMATION | 810 |
| MAPPING | 812 |
| PRE-FILL VALUES | 814 |
| INSTANCE ID | 816 |

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKewed/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.